


AS-Interface control cabinet module

SmartL25 4DI 3DO T C

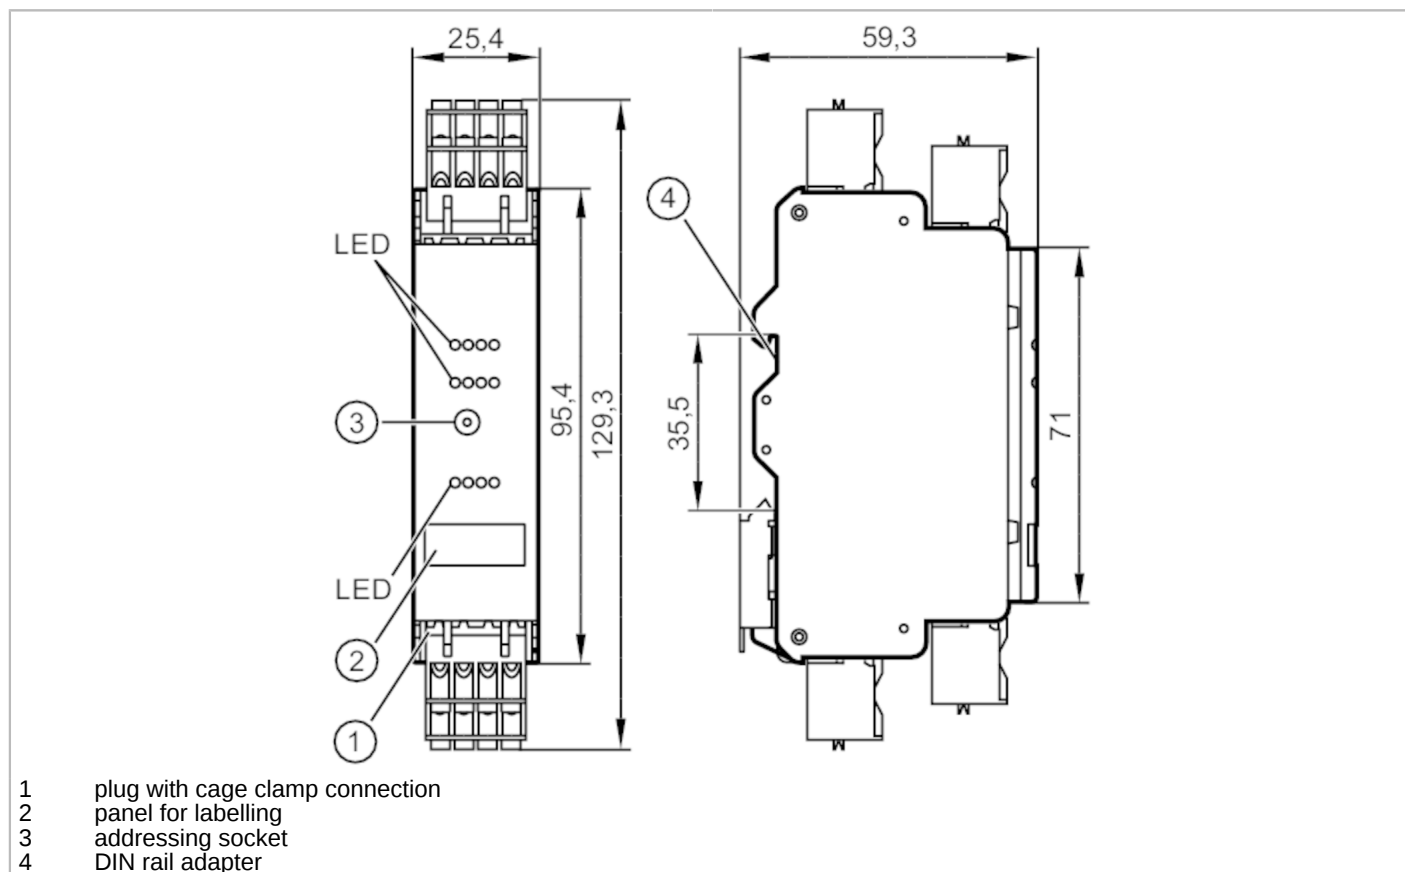

Application

Design	housing for DIN rail mounting
Application	Installation in control cabinets

Electrical data

Operating voltage [V]	18...31.6 DC
Max. current consumption from AS-i [mA]	250
Additional voltage supply [V]	20...30 DC; (AUX)
Max. current consumption from additional supply [mA]	3000; (AUX)
Integrated watchdog	yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 3
------------------------------	---

Inputs

Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Power supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	200
Input current High [mA]	6...10



AS-Interface control cabinet module

SmartL25 4DI 3DO T C

Input current Low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

Outputs

Number of digital outputs		3
Circuit		PNP
Voltage range DC	[V]	20...30; (AUX)
Max. current load per output	[mA]	1000; (utilisation category DC-12: 700 mA; utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total	[A]	3
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX

Operating conditions

Ambient temperature	[°C]	-25...60
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 40 °C
Storage temperature	[°C]	-25...75
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Protection rating terminals		IP 20
Pollution degree		2

Tests / approvals

EMC		EN 62026-2	
		EN 61000-6-2	
		EN 61000-6-3	
MTTF	[years]	264	
Notes		The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.	

AS-i classification

AS-i version	2.11; 3.0				
AS-i addressing	addressing socket				
Extended addressing mode	yes				
AS-i master profile	M2; M3; M4				
AS-i profile	S-7.A.E				
AS-i I/O configuration	[hex]	7			
AS-i ID code	[hex]	A.E			
Assignment of the data bits	data bit	D0	D1	D2	D3
	input	I-1	I-2	I-3	I-4
	Output	O-1	O-2	O-3	-

Mechanical data

Weight	[g]	131.2
--------	-----	-------



AS-Interface control cabinet module

SmartL25 4DI 3DO T C

Housing	rectangular
Type of mounting	mounting on DIN rail; (TH35 (EN 60715))
Dimensions [mm]	129.3 x 25.4 x 59.3
Materials	plastics; PC-GF20

Displays / operating elements

Display	switching status	LED, yellow I1...I4, O1...O3
	operation	LED, green AS-i, AUX
	errors	LED, red

Accessories

Items supplied	cage clamps
----------------	-------------


Remarks

Remarks	Do not connect any of the following points to an external potential:	
	I-, I+, I1, I2, I3, I4	
	The connections are electrically connected with the AS-i cable.	
Pack quantity	1 pcs.	

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

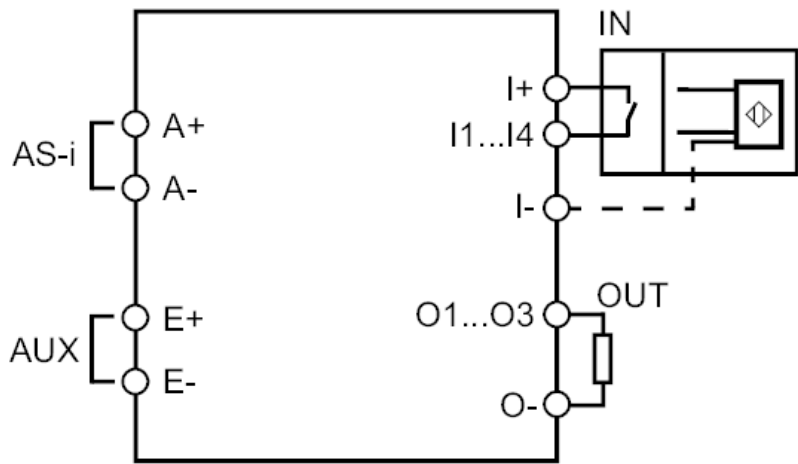

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
E+	external voltage supply for actuators +24V (AUX)
E-	external voltage supply for actuators 0V (AUX)
I1...I4	switching input sensor 1...4
O1...O3	switching output actuator 1...3
O-	switching output actuator 0V