


SM2601



Magnetic-inductive flow meter

SMN21XGXFRKG/US-100

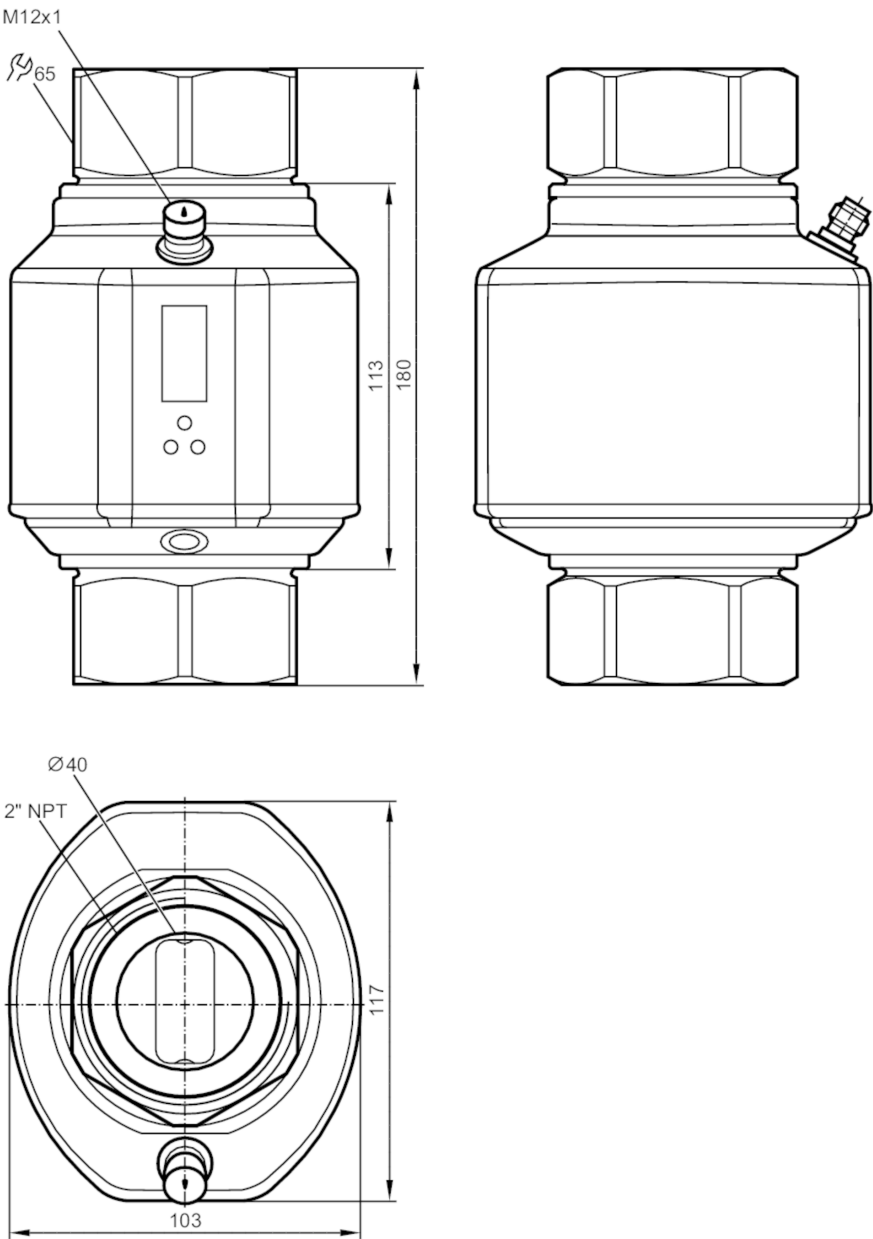

CE CRN cUL US LISTED EC 1935/2004 FCM IO-Link UK CA

Product characteristics		
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1	
Measuring range	80...9600 gph	1.3...160 gpm
Process connection	threaded connection 2" NPT internal thread DN50	
Application		
Special feature	Gold-plated contacts	
Application	totaliser function; empty pipe detection; for industrial applications	
Media	conductive liquids; water; hydrous media	
Note on media	conductivity: ≥ 20 μS/cm	
	viscosity: < 70 mm²/s (40 °C)	

SM2601



Magnetic-inductive flow meter

SMN21XGXFRKG/US-100

Medium temperature	[°F]	14...194		
Pressure rating		16 bar	232 psi	1.6 MPa
MAWP for applications according to CRN		8.9 bar	0.89 MPa	

Electrical data				
Operating voltage	[V]	18...32 DC; (to SELV/PELV)		
Current consumption	[mA]	< 150		
Protection class		III		
Reverse polarity protection		yes		
Power-on delay time	[s]	5		
Measuring principle		magnetic-inductive		

Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1

Inputs	
Inputs	counter reset

Outputs	
Total number of outputs	2
Output signal	switching signal; analogue signal; pulse signal; frequency signal; IO-Link; (configurable)
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V] 2
Permanent current rating of switching output DC	[mA] 250; (per output)
Number of analogue outputs	1
Analogue current output	[mA] 4...20; (scalable)
Max. load	[Ω] 500
Analogue voltage output	[V] 0...10; (scalable)
Min. load resistance	[Ω] 2000
Pulse output	flow rate meter
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes
Frequency of the output	[Hz] 0.1...10000

Measuring/setting range		
Measuring range	80...9600 gph	1.3...160 gpm
Display range	-11520...11520 gph	-190...190 gpm
Resolution	5 gph	0.1 gpm
Set point SP	130...9600 gph	2.1...160 gpm
Reset point rP	80...9550 gph	1.3...159.2 gpm
Analogue start point ASP	0...7680 gph	0...128 gpm
Analogue end point AEP	1920...9600 gph	32...160 gpm
Low flow cut-off LFC	< 240 gph	< 4 gpm
In steps of	5 gph	0.1 gpm



Magnetic-inductive flow meter

SMN21XGXFRKG/US-100

Measuring dynamics	1:120	
Volumetric flow quantity monitoring		
Pulse value	0.02...160 E06 gal	
In steps of	0.02 gal	
Pulse length [s]	0,008...2	
Temperature monitoring		
Measuring range [°F]	-4...176	
Display range [°F]	-40...212	
Resolution [°F]	0.5	
Set point SP [°F]	-2...176	
Reset point rP [°F]	-3...175	
Analogue start point [°F]	-4...140	
Analogue end point [°F]	32...176	
In steps of [°F]	0.5	
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	± (0,8 % MW + 0,5 % MEW)	
Repeatability	± 0,2% MEW	
Temperature monitoring		
Temperature drift	± 0,0185 °F / K	
Accuracy [K]	± 1 (77 °F; Q > 4 gpm)	
Response times		
Flow monitoring		
Response time [s]	0.35; (dAP = 0)	
Delay time programmable dS, dr [s]	0...50	
Damping process value dAP [s]	0...5	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 3 (Q > 4 gpm)	
Software / programming		
Parameter setting options	Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / normally closed; switching logic; current/voltage/frequency/ pulse output; start-up delay; display can be deactivated; Display unit; empty pipe detection	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
SIO mode	yes	
Required master port type	A	

SM2601



Magnetic-inductive flow meter

SMN21XGXFRKG/US-100

Process data analogue		3
Process data binary		2
Min. process cycle time	[ms]	5
Supported DeviceIDs	Type of operation	DeviceID
	default	390

Operating conditions		
Ambient temperature	[°F]	14...140
Storage temperature	[°F]	-13...176
Protection		IP 65; IP 67

Tests / approvals		
EMC	DIN EN 60947-5-9	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	85
UL approval	UL approval no.	I008
	File number UL	E174189
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	2643
Housing		rectangular
Dimensions	[mm]	180 x 103 x 117
Materials		stainless steel (316L/1.4404); stainless steel (316Ti/1.4571); PEI; FKM; PBT-GF20; TPE-U
Materials (wetted parts)		stainless steel (316L/1.4404); stainless steel (316Ti/1.4571); PEEK; FKM
Process connection		threaded connection 2" NPT internal thread DN50

Displays / operating elements		
Display	Display unit	6 x LED, green (gpm, gph, gal, °F, 10 ³ , 1000 x 10 ³)
	switching status	2 x LED, yellow
	measured values	alphanumeric display, 4-digit
	programming	alphanumeric display, 4-digit

Accessories		
Items supplied	Label	

Remarks		
Remarks	MW = measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	

Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		



Magnetic-inductive flow meter

SMN21XGXFRKG/US-100


Connection



- OUT1:
- colours to DIN EN 60947-5-2
 - switching output empty pipe detection
 - switching output volumetric flow quantity monitoring
 - frequency output volumetric flow quantity monitoring
 - Pulse output quantity meter
 - signal output Preset counter
 - IO-Link
- OUT2:
- switching output empty pipe detection
 - switching output volumetric flow quantity monitoring
 - switching output Temperature monitoring
 - analogue output volumetric flow quantity monitoring
 - analogue output Temperature monitoring
 - input counter reset
- Core colours :
- BK = black
 - BN = brown
 - BU = blue
 - WH = white

Diagrams and graphs

Pressure loss

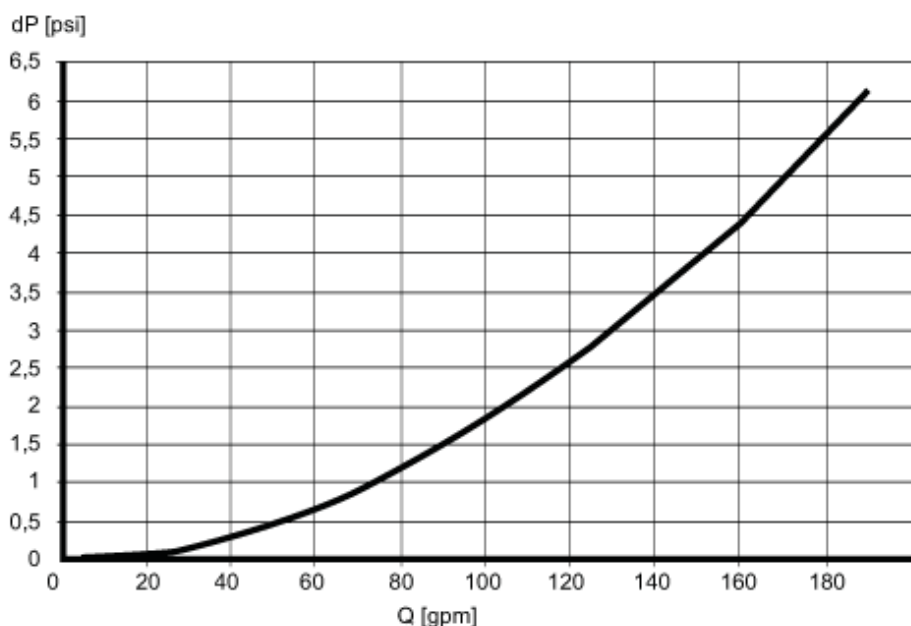

dP Pressure loss

Q volumetric flow quantity