


SM8050



Magnetic-inductive flow meter

SMR11GGX10KG/US

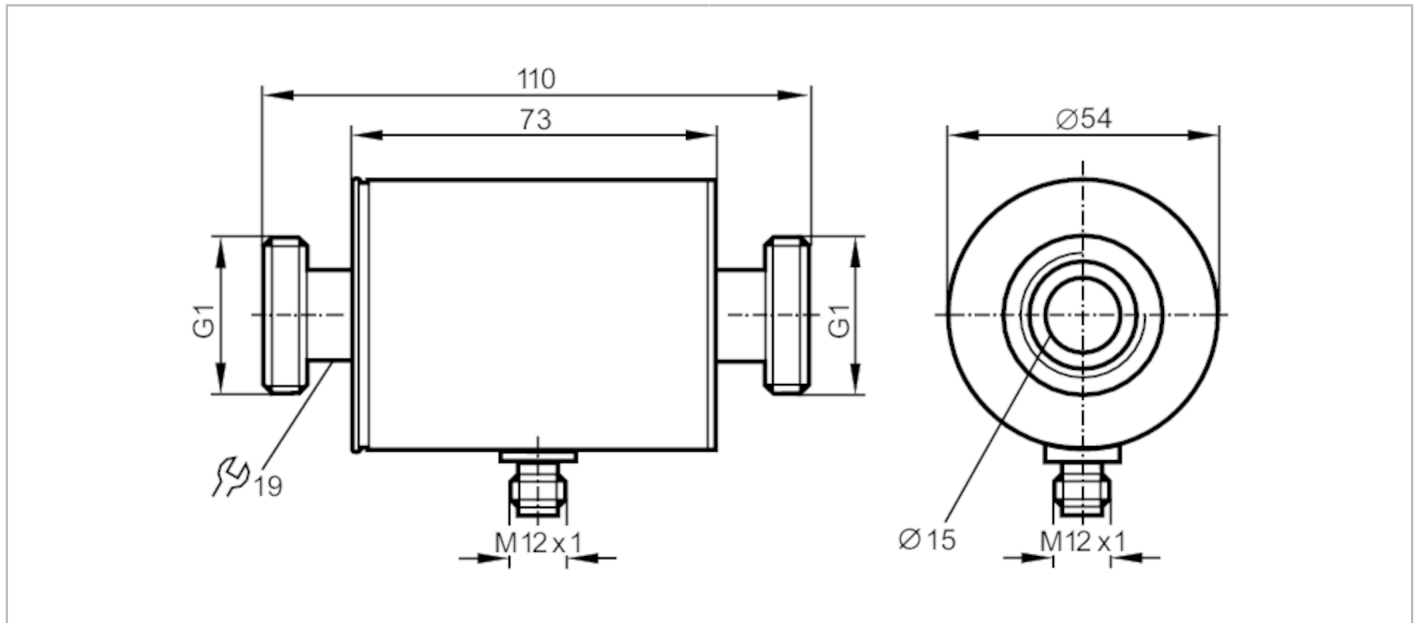

Product characteristics	
Number of inputs and outputs	Number of analogue outputs: 1
Measuring range [l/min]	0.2...100
Process connection	threaded connection G 1 external thread DN25 flat seal
Application	
Special feature	Gold-plated contacts
Application	for industrial applications
Installation	connection to pipe by means of an adapter
Media	conductive liquids; water; hydrous media
Note on media	conductivity: $\geq 20 \mu\text{S/cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C)
Medium temperature [°C]	-10...70
Pressure rating	16 bar 1.6 MPa
MAWP for applications according to CRN	10.4 bar 1.04 MPa
Electrical data	
Operating voltage [V]	18...30 DC; (to SELV/PELV)
Current consumption [mA]	95; (24 V)
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	5
Measuring principle	magnetic-inductive
Inputs / outputs	
Number of inputs and outputs	Number of analogue outputs: 1
Outputs	
Total number of outputs	1

SM8050



Magnetic-inductive flow meter

SMR11GGX10KG/US

Output signal	analogue signal; IO-Link; (configurable)	
Permanent current rating of switching output DC [mA]		250
Number of analogue outputs		1
Analogue current output [mA]		4...20
Max. load [Ω]		500
Overload protection		yes

Measuring/setting range

Measuring range [l/min]	0.2...100
-------------------------	-----------

Accuracy / deviations

Flow monitoring	
Accuracy (in the measuring range)	$\pm (0,8 \% MW + 0,5 \% MEW)$
Repeatability	$\pm 0,2\% MEW$

Response times

Flow monitoring	
Response time [s]	0.15; (dAP = 0, T19)

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	yes	
Required master port type	A	
Process data analogue	2	
Min. process cycle time [ms]	5	
Supported DeviceIDs	Type of operation	DeviceID
	default	577

Operating conditions

Ambient temperature [$^{\circ}\text{C}$]	-10...60
Storage temperature [$^{\circ}\text{C}$]	-25...80
Protection	IP 67

Tests / approvals

EMC	DIN EN 60947-5-9	
CPA approval	model number	002MI
	accuracy class	-
	maximum allowable error	$\pm 1,5 \% FS$
	Q (min)	0,01 m ³ /h
	Q (t)	-
	Q (max)	6 m ³ /h
Shock resistance	DIN IEC 68-2-27 20 g (11 ms)	

SM8050



Magnetic-inductive flow meter

SMR11GGX10KG/US

Vibration resistance	DIN IEC 68-2-6	5 g (10...2000 Hz)
MTTF [years]		167
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data

Weight [g]	575
Housing	cylindrical
Dimensions [mm]	Ø 54 / L = 110
Materials	stainless steel (316L/1.4404); PBT-GF20; FKM; TPE
Materials (wetted parts)	stainless steel (316L/1.4404); PEEK; FKM
Process connection	threaded connection G 1 external thread DN25 flat seal

Remarks


Remarks	MW = measured value
	MEW = Final value of the measuring range
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

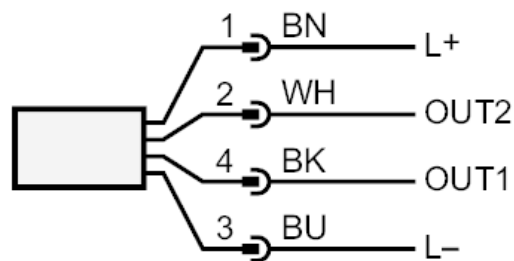

colours to DIN EN 60947-5-2

OUT1: IO-Link
OUT2: analogue output
Core colours :

BN = brown
WH = white
BK = black
BU = blue

SM8050




Magnetic-inductive flow meter

SMR11GGX10KG/US

Diagrams and graphs

Pressure loss

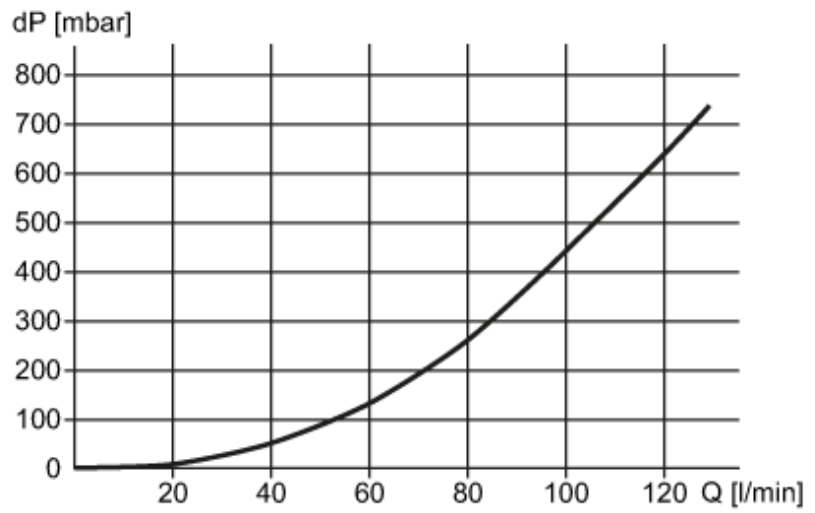

dP Pressure loss

Q volumetric flow quantity