


RM9007



Absolute multiturn encoder with solid shaft

RMS0024-C24/US6

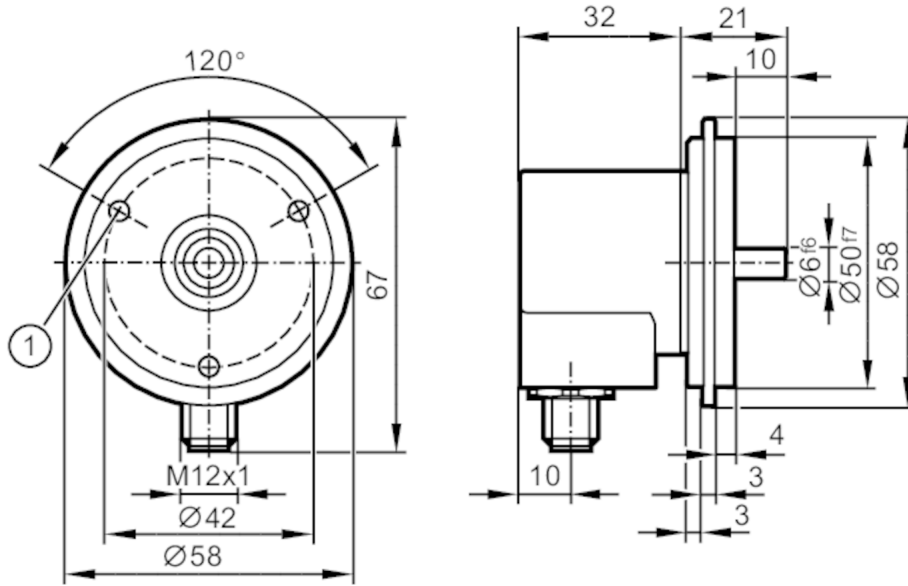

Product characteristics

Resolution	4096 steps; 4096 revolutions; 24 bit
Communication interface	CAN
Shaft design	solid shaft
Shaft diameter [mm]	6

Application

Function principle	absolute
Revolution type	multiturn

Electrical data

Operating voltage	[V]	9...30 DC
Current consumption	[mA]	< 100; ((10 V DC) ; ≤ 50 (24 V DC))
Protection class		III
Reverse polarity protection		yes

Outputs

Output function	CANopen interface
Short-circuit protection	yes
Code	binary

Measuring/setting range

Resolution	4096 steps; 4096 revolutions; 24 bit
------------	--------------------------------------

Accuracy / deviations

Accuracy	[°]	0.08
----------	-----	------

Software / programming

Parameter setting options	CAN parameter; scaling; preset; Baud rate; direction of rotation; node ID
---------------------------	---



Absolute multiturn encoder with solid shaft

RMS0024-C24/US6

Interfaces		
Communication interface		CAN
Number of CAN interfaces		1
CAN		
Protocol		CANopen
Factory settings		Baud rate: 125 kBit/s
		node ID: 32
Version		DSP - 406 V3.1; DS 301 V4.02; DS 306 V2.0
Terminating resistor		yes
Operating conditions		
Ambient temperature [°C]		-40...85
Protection		IP 65
Tests / approvals		
Shock resistance		EN 60068-2-27100 g / 6 ms
Vibration resistance		EN 60068-2-610 g / 10...1000 Hz
MTTF [years]		240
Mechanical data		
Weight [g]		282.75
Housing		cylindrical
Dimensions [mm]		Ø 58 / L = 39
Materials		flange: aluminium; housing cap: steel
Max. revolution, mechanical [U/min]		12000
Max. starting torque [Nm]		0.03
Reference temperature torque [°C]		20
Shaft design		solid shaft
Shaft diameter [mm]		6
Shaft material		stainless steel (303/1.4305)
Max. shaft load axial (at the shaft end) [N]		40
Max. shaft load radial (at the shaft end) [N]		110
Fixing flange		synchro-flange
Remarks		
Pack quantity		1 pcs.

RM9007




Absolute multiturn encoder with solid shaft

RMS0024-C24/US6

Electrical connection

Connector: 1 x M12, axial; coding: A



1	CAN_GND
2	VBBc
3	GND (PE)
4	CAN_High
5	CAN_Low