


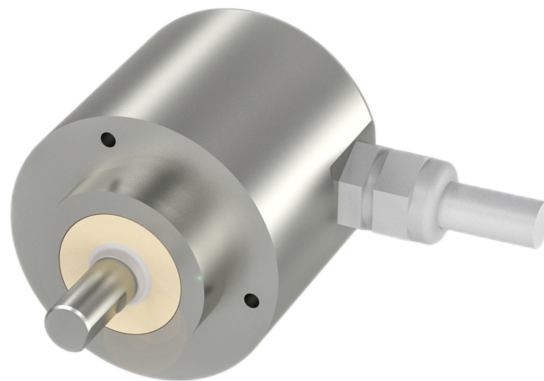

BDG abbcc-ddee-fghhi-jjkk-llmm-nnoo

BDG
Encoders

a Principle
F = absolute

bb Version
BC = V4A (1.4404 or 1.4571) mag. shielded radial (58)

cc Flange size
58 = 58 mm

dd Shaft form, flange
PC = Shaft with flat, trim ring (IP67/IP69K)

ee Shaft diameter
10 = 10 mm

f Interface category
N = Absolute digital, bidirectional

g Interface
H = CANopen
J = SAE J1939
V = CANopen with terminating resistor 120 Ω
W = SAE J1939 with terminating resistor 120 Ω

hh Interface details

CA = CANopen, v1
DA = SAE J1939, v1

i Supply voltage
2 = 4.75...32 VDC

jj Resolution single turn
1 - 16 = 1 - 16 bits

kk Resolution multi turn
0 - 43 = 0 - 43 bits (depending on interface)

ll Shielded cable
AE = PVC gray, 2x0.34 + 10x0.14 mm²

mm Cable length
20 = 2 m
50 = 5 m
A0 = 10 m

nn connector
00 = no connector

oo Wire assignments (connector / cable)
J1 = CAN/SAE J1939 for M12 connector and shielded cable

Basic features

Approval/Conformity	CE
	cULus
	WEEE
	Ecolab
Measuring principle	UKCA
	absolute measuring system

Electrical connection

Connection	Cable
------------	-------

Electrical data

Mean life expectancy	1x 10 ⁹ revs. at 100 % rated shaft load
	1x 10 ¹⁰ revs. at 40 % rated shaft load
	1x 10 ¹¹ revs. at 20 % rated shaft load
Multi turn technology	Wiegand wire
Operating voltage U _B	4,75 ... 32 VDC
Single turn accuracy	± 0.0878° (≤ 12 bits)
Single turn repeat accuracy	± 0.0878° (≤ 12 bits)
Single turn technology	Hall sensor
Speed max.	3600 U/min
Switch-on delay max.	1.5 s

Environmental conditions

Ambient temperature	-42...80 °C
IP rating	IP67
	IP69K Salt mist test DIN EN 60068-2-11 passed after 672 hours.
Storage temperature	-20...80°C

Functional safety

Diagnostic coverage	0 %
MTTF (40 °C)	1000 a
Mission Time	20 a

Interface

Interface	CAN
-----------	-----

Material

Housing material	Stainless steel (1.4404)
Material flange	1.4404 stainless steel

Mechanical data

Bearings type	2x precision ball bearings
Flange type	Clamping flange
Housing diameter	58 mm
Shaft diameter	10 mm
Shaft length	18 mm
Shaft load axial max.	100 N
Shaft load radial max.	100 N
Starting torque typ.	ca. 1 Ncm bei Raumtemperatur

Remarks

Interface details SAE J1939:

Count direction: (view on shaft) ccw

ECU address: 0x 0A

Process data identifier: 0x18FF000A

PGN: 0xFF00

Process Data Mapping: Byte 0-3 32 Bit Position Value

Byte 4 8 Bit Error Register

The setting of the PDU timer and Position Preset can be done via configuration PGN 0xEF00 (Prop. A).

PDU - Time: 50 ms (default)

Configuration PGN: 0x EF 00 (Prop. A)

Byte 0: 0x 01

Byte 1: 0x FF

Byte 2: PDU time LSB

Byte 3: PDU time MSB

Byte 4: Preset LSB

Byte 5, 6: Preset

Byte 7: Preset MSB

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring diagramm

J1 (CAN/SAE J1939)

CAN/SAE J1939	J1	
Signal	Pin	Color
+UB	2	BN
OG	3	WH
CANHigh	4	GN
CANlow	5	YE
CANGND/Shield	1	housing

Product View

Cable outlet radial

